





When there's work to be done on the far side of nowhere, you need a vehicle that can get you there quickly, get the job done efficiently, and get you back comfortably.

Introducing the all-new RTV X-Series from Kubota.

Three rugged and reliable utility vehicles with more of the things that you need to get the job done right.

RTV-X1120D

A step up in power, comfort, convenience, and style, the all-new RTV-X1120D has everything you need to get the job done, including a rugged and dependable 24.8 HP diesel engine and handsome blue-tinted halogen headlights.

RTV-X1100C

The first RTV to offer a factory-installed unibody A/C cab, the RTV-X1100C is still the industry leader in luxurious driving comfort. The fully enclosed cab features air conditioning, defroster, and heating systems to keep you comfortable in all types of weather.



when and where you need it.

Power when and where you need it

Even when the trail disappears, you can rely on the RTV X-Series' powerful diesel engines to keep you moving forward. Kubota-built and trail-proven, these 3-cylinder liquid-cooled diesel engines have a well-earned reputation for dependable performance even in the harshest terrains. The RTV-X900 comes with a robust 21.6 HP engine, while the RTV-X1120D and RTV-X1100C provide an extra boost of power from 24.8 HP engines.







RTV-X900

VHT-X (Variable Hydraulic Transmission)

Kubota has more experience in variable hydraulic transmissions than any other Utility Vehicle manufacturer. Kubota's advanced VHT-X offers a wide torque band and large oil coolers that boost performance and durability.



Two-speed In-line Shift

You'll shift less often and maintain better control, thanks to new transmission gearing with just two forward speeds (high and low), plus neutral, and reverse.



Strong High-rigidity Frame

The high-rigidity steel frame isolates the occupants from noise, vibrations, and harshness. With structural strength that few in the industry can

match, this durable frame can take years of punishment from heavy loads and rough terrain.

20% Larger, Clogresistant Radiator

Open the hood, and you'll find the radiator and air-intake located high and up front, where the air is cleaner and cooler. This improves both radiator performance and simplifies maintenance. Kubota's wide fin pitch design minimizes clogging, further improving radiator performance.





Get in and buckle up. You're about to experience a whole new level of driving performance.

Front & Rear Extra Duty Independent **Suspension**



Regardless of the terrain or load, independent suspension on all four wheels ensures a truly exceptional ride. **Kubota's Extra Duty IRS (Independent** Rear Suspension) technology also sets a new standard for durability.





Height-adjustable Front and Rear Suspension

Whether you've got a heavy load or no load at all, adjustment of the front and rear suspension height will ensure the proper vehicle height for a smooth ride and optimum driveability.

High Ground Clearance

The new X-series raises the bar on ground clearance—to a full 263 mm with 205 mm of suspension travel—letting you glide over the bumps rather than through them.

Limited-Slip Front Differential

True 4-wheel drive with a limited-slip front differential and a locking rear differential help reduce wheelspin to a minimum, giving you greater control and a smoother ride on rough or muddy terrain.

CV Joint **Protectors** and **Skid Plates**

Obstacles on the trail? CV ioint protectors and heavyduty skid plates will protect the most critical parts of the engine and transmission.



Dynamic Braking

You'll feel more secure, especially when traveling down long inclines. knowing that dynamic braking is providing additional braking power and greater driving control.







60:40 Split-bench Seats

The split-bench style seat is ergonomically designed to provide hours of riding comfort. The driver's side is adjustable fore and aft.*

*Driver's side seat adjuster is not available on RTV-X900 General Purpose models.



Easily accessible Parking Brake

The parking brake is conveniently located on the dashboard for easier access as well as more legroom.



Power Steering

Responsive hydrostatic power steering gives you the control you need to tame any terrain. The steering wheel is tilt-adjustable, allowing you to set the optimum angle for your driving style.*

*Tilt-feature is not available on RTV-X900 General Purpose models.



Digital Meter Cluster

Bright, with large, easy-to-read indicators, this digital meter cluster keeps you informed of all critical driving conditions, including speed, hours, and miles traveled. An Overheat Alarm (light and audio) helps prevent engine damage.



Glove Box*

A large glove box on the passenger side provides fast access to critical tools and personal effects.

*Glove box is not available on RTV-X1100C models.

*Glove box cover is optional on RTV-X900 General Purpose models.



Under-seat Storage Compartments

Large compartments under the split-bench seats provide plenty of convenient storage space for tools, tie-downs, and personal items.





Get ready for an all-new level of comfort and performance. Get ready

Here's the one you've been waiting for. The one with more of everything.

More power, more convenience, more comfort, more style. We call it the RTV-X1120D. You'll call it amazing.

More Powerful Engine

For jobs that require extra acceleration and climbing power, the RTV-X1120D is the obvious choice. It packs Kubota's proven 24.8 HP diesel engine, which provides a top speed of 46.4 km/h and plenty of hill-climbing power.



Sculpted, Blue-tinted Headlights

Bright and far-reaching halogen headlights with adjustable optical axis provide plenty of

light for driving in dim-light conditions. Sculpted and tinted blue, these handsome lights add a touch of class to the RTV-X1120D's distinctive styling.







RTV-X1120D

Three-point Seatbelts

With the RTV-X1120D's increased speed comes increased dynamic loads; so you and your passenger are strapped in with three-point seatbelts.

Half Door

Half doors on the driver and passenger sides help keep out the dirt, brush, and other external objects, while letting you enter and exit with ease.




New Alloy Wheels

You'll travel in style with these good-looking, machine-polished alloy wheels.* Clear Coating

helps keep them bright and shiny.

*Realtree AP Camo model features black alloy wheels with polished outer surfaces.



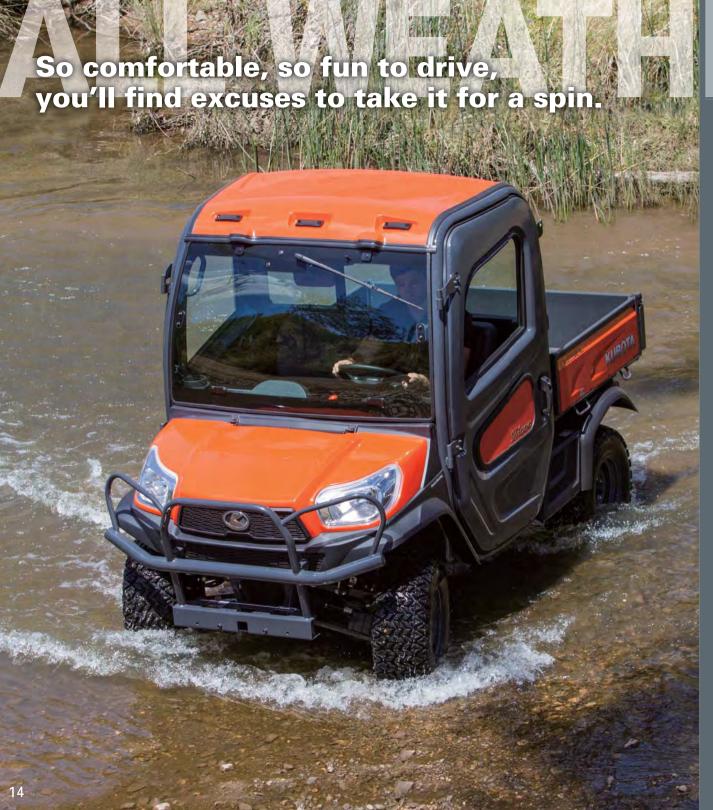

ER CO

Premium Grand Cab

Whether it's hot and humid, cold and windy, or raining cats and dogs, you'll stay dry and comfortable inside the RTV-X1100C's quiet and luxurious air-conditioned and heated cab. Built around a unibody frame that is virtually airtight, soundproof, and rattle-free, the cab incorporates highly efficient air-conditioning, heating, and defogging functions, as well as antennas and speakers for an optional radio. And when the weather is nice? Just roll down the fully opening windows. This truly is the best all-weather, all-comfort, all-the-time driving environment you'll ever experience on the trail.



MFORT CAB

RTV-X1100C

Air Conditioner and Heater

Hot or cold, rain or shine, the temperature inside can always be just right for you. The air conditioner, defroster, and heater system are powerful, efficient, and standard equipment on the RTV-X1100C.





Unibody Cab and Chassis Frame

You'll enjoy a smoother, quieter, more comfortable ride, thanks to the RTV-X1100C's integrated unibody cab and chassis frame. They form a rigid yet lightweight unit that is rugged, airtight, lownoise, and rattle-free. Even more impressive, the



Specifications

Model			RTV-X900 General Purpose	RTV-X900 Worksite	RTV-X 1120D		RTV-X1100C
Body color			Kubota Orange	Kubota Orange	Kubota Orange	Realtree® AP Camo	Kubota Orange
Engine	Make		KUBOTA D			KUBOTA D1105-E4-UV	
	Туре				3-cylinders, 4-cycle, diesel, OHV		
	Displacement	cu. in. (cc)	54.3 (898)		68.5 (1123)		
	Horsepower	HP (kW)/rpm	21.6 (16.	21.6 (16.1)@3200		24.8 (18.5)@3000	
	Cooling system		Liquid				
	Battery		540 CCA 650 CCA				
Transmission		Variable hydro transmission (VHT-X)					
Gear selection			Hi-Lo range forward, neutral, reverse				
Max. travelling speed mph (km/h)			0-25 (0-40)			0-25 (0-40)	
4WD system	Front differential		Limited-slip differential				
	Rear differential		Foot operated differential lock				
Steering		Hydrostatic power					
Front / Bear			Wet-disc brakes				
Brakes	Parking brake		Rear wheel, hand operated				
	Front suspension		Independent, Dual A-arms with adjustable spring preload				
Suspension	Front suspension travel	mm	205				
	Rear suspension		Independent with coil over shock				
	Rear suspension travel	mm	205				
Ground clearance	Front	mm	266 266				
	Rear	mm	263				
	Under foot platform	mm			280		
Headlights	Ondor root planomi		Two 37.5 watt halogen Two 37.5 watt blue-tint halogen, optical axis adjustment				Two 37.5 watt halogen
Tubular overhead structure mm		re mm	Two 37.5 watt naiogen Two 37.5 watt naiogen, optical axis adjustmi		lalogeri, optical axis adjustifierit	1 WO 37.5 Watt flalogeri	
Occupant Protective System (OPS)	Ve Seat belts		2-point			3-point	2-point
	Certification		SAE J2194 and OSHA 1928 ROPS		SAE J2194 and OSHA 1928 ROPS and ANSI B71.9		SAE J2194 and OSHA 1928 ROPS
Dimensions	Length	mm	3055 SAE JZ 194 AND OSHA 1926 ROPS AND SAE JZ 194 AND OSHA 1926 ROPS AND AND SAE JZ 194 AND OSHA 1926 ROPS AND AND SAE JZ 194 AND OSHA 1926 ROPS AND AND SAE JZ 194 AND OSHA 1926 ROPS AND AND SAE JZ 194 AND OSHA 1926 ROPS AND AND SAE JZ 194 AND OSHA 1926 ROPS AND AND SAE JZ 194 AND OSHA 1926 ROPS AND AND SAE JZ 194 AND OSHA 1926 ROPS AND AND SAE JZ 194 AND OSHA 1926 ROPS AND AND SAE JZ 194 AND OSHA 1926 ROPS AND AND SAE JZ 194 AND OSHA 1926 ROPS AND AND SAE JZ 194 AND OSHA 1926 ROPS AND SAE JZ 194 AND SAE JZ			SAL 32194 and OSHA 1920 HOFS	
	Width	mm	1605				1660
	Height, overall	mm	2020				2090
	Front tread centers	mm	1240				2000
	Rear tread centers	mm					
	Wheelbase	mm	1240 				
	Turning radius	m			4.0		
Weight	Turning radius	kg		895	4:0	935	1075
Towing capacity		kg		893	590		1073
Payload capacity				725		685	739
ayload capacity	Material	kg	733	723	Steel		755
Cargo bed			1465 1030 285				
	Width Length Depth Volume	mm m³	0.43				
	Bed height (unloaded) Cargo bed load	mm	500				
	Dumping system	kg	Manual				
Free Lands and a state	Dumping system		Manual Hydro power lift 30				
Fuel tank capacity Sound rating at operator's ear at max rpm dB. (A)			85 84				
ATV Sound rating at operator's ear at max rpm dB. (A)						83	
Tyres			25 10-12, 6-ply				
	HDWS TURF		25 10-12, 6-ply				
			25 12-12, 4-ply				
Front guard design			Simple, center only	Center and bumper		Centre, bumper and lens	
Alloy wheel			0	pt.		Std.	Opt.
Hydraulic bed lift			Opt.			Std.	

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty and safety information. The values in "Ground clearance" and "Weight" are those of the machine equipped with the tires in the table above. Some RTVs in this brochure are shown with optional accessories. For off-highway use only.

KUBOTA Tractor Australia Pty Ltd

25-29 Permas Way, TRUGANINA Vic, 3029 Freecall: 1800 334 653 Email: sales@kubota.com.au

Web Site: http://www.kubota.com.au

CB Norwood Distributors Ltd

PO Box 1265, 888 Tremaine Avenue, Palmerston North 0800 KUBOTA Tel: 06 356 4920 Fax: 06 356 4939

Web Site: http://www.kubota.co.nz